



Wall Systems
MINERAL Wallcoustic Line
(THERMATEX® Line Modern)
Individual


























- MINERAL Wallcoustic Line is a pre-assembled aluminium framed wall absorber with a standard white, laminate surface finish. It can also be ordered in a variety of colours or customised printed motifs on request
- Customise and enhance the visual appearance and acoustic ambience in any space
- The wall panel is delivered in one piece and is quick and easy to install using eccentric screws and installation key



MINERAL Wallcoustic Line

Individual

Thickness (mm)		43																																										
Dimensions (mm) Additional sizes on request		1200 x 600 1200 x 1200 1800 x 1200 2400 x 1200																																										
System		Eccentric bracket																																										
Weight		9.4 kg/m ²																																										
Colour & design		<p>Frame: Anodised Aluminium, White, Colours</p> <div style="display: flex; align-items: center;"> <div style="border: 1px solid black; width: 40px; height: 40px; background-color: white; margin-right: 10px;"></div> <div style="font-size: 0.8em; font-weight: bold; color: #0070C0;">Vario Design Colours</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="text-align: center;"> White</div> <div style="text-align: center;"> Granite</div> <div style="text-align: center;"> Steel</div> <div style="text-align: center;"> Green Marble</div> <div style="text-align: center;"> Copper</div> <div style="text-align: center;"> Oak</div> <div style="text-align: center;"> Brass</div> <div style="text-align: center;"> Sandstone</div> <div style="text-align: center;"> Concrete</div> </div> <p>Motif: Custom Graphic Print</p>																																										
Sound absorption		<p>EN ISO 354</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th>Frequency f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Equivalent Absorption Area Aobj*</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Rectangle: 1200 x 600mm</td> <td>0.20</td> <td>0.60</td> <td>1.00</td> <td>0.90</td> <td>0.80</td> <td>0.90</td> </tr> <tr> <td>Square: 1200 x 1200mm</td> <td>0.50</td> <td>1.10</td> <td>1.60</td> <td>1.50</td> <td>1.50</td> <td>1.50</td> </tr> <tr> <td>Rectangle: 1800 x 1200mm</td> <td>0.60</td> <td>1.90</td> <td>2.50</td> <td>2.40</td> <td>2.20</td> <td>2.40</td> </tr> <tr> <td>Rectangle: 2400 x 1200mm</td> <td>1.10</td> <td>2.20</td> <td>3.10</td> <td>3.10</td> <td>3.00</td> <td>3.10</td> </tr> </tbody> </table> <p style="text-align: right; font-size: 0.7em; color: #0070C0;">*Values shown are the average of the 3 one third octave band values</p>	Frequency f (Hz)	125	250	500	1000	2000	4000	Equivalent Absorption Area Aobj*							Rectangle: 1200 x 600mm	0.20	0.60	1.00	0.90	0.80	0.90	Square: 1200 x 1200mm	0.50	1.10	1.60	1.50	1.50	1.50	Rectangle: 1800 x 1200mm	0.60	1.90	2.50	2.40	2.20	2.40	Rectangle: 2400 x 1200mm	1.10	2.20	3.10	3.10	3.00	3.10
Frequency f (Hz)	125	250	500	1000	2000	4000																																						
Equivalent Absorption Area Aobj*																																												
Rectangle: 1200 x 600mm	0.20	0.60	1.00	0.90	0.80	0.90																																						
Square: 1200 x 1200mm	0.50	1.10	1.60	1.50	1.50	1.50																																						
Rectangle: 1800 x 1200mm	0.60	1.90	2.50	2.40	2.20	2.40																																						
Rectangle: 2400 x 1200mm	1.10	2.20	3.10	3.10	3.00	3.10																																						
Fire reaction		Euroclass A2-s1,d0 as per EN 13501-1																																										
Light reflectance		Up to 88%																																										
Humidity resistance		90%																																										
Cleanability	 																																											
Sustainability																																												

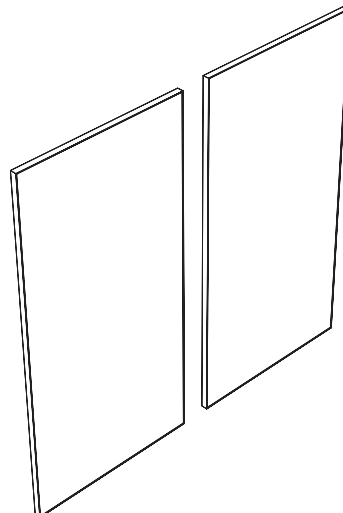

Detail: Eccentric bracket